


# Chevron Belt Cleaner

## SECONDARY CONVEYOR BELT CLEANING SYSTEM



The Chevron Belt Cleaner is specially designed to effectively remove carryback from challenging chevron, cleated, or raised rib conveyor belts. Its flexible polyurethane fingers ensure efficient cleaning without causing any damage to the belt. The powder-coated mounting brackets offer two attachment options to suit your specific operational needs.

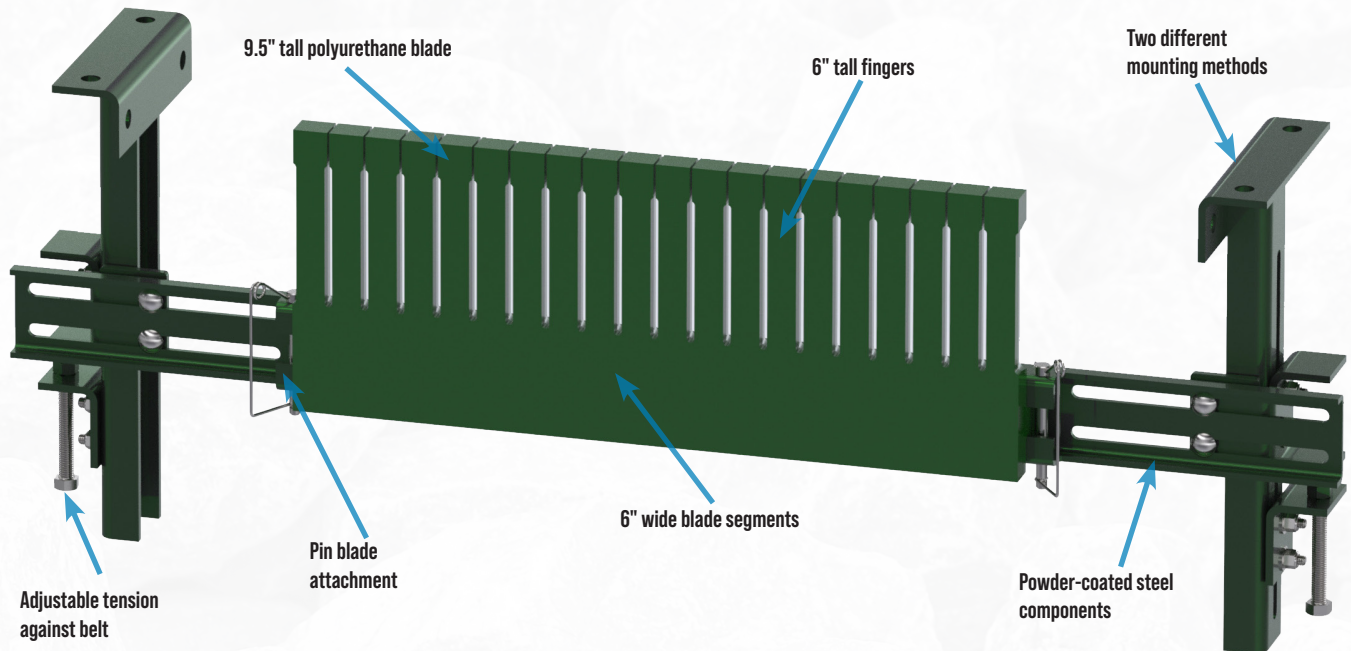


### FEATURES & BENEFITS:

- 9.5" tall blade sections with 6" tall fingers
- 6" wide blade sections easily slide onto mainframe for quick and simple replacement
- Won't damage chevron, cleated, or raised rib belts
- Suitable for both mechanically spliced and vulcanized belts
- No external springs or components prone to material build-up, minimizing maintenance requirements
- Well-suited for industries like sand processing, biomass power plants, recycling, agriculture, food processing, timber, paper manufacturing, and port loading facilities



# SIZING INFORMATION

Dimensions - in. (mm)

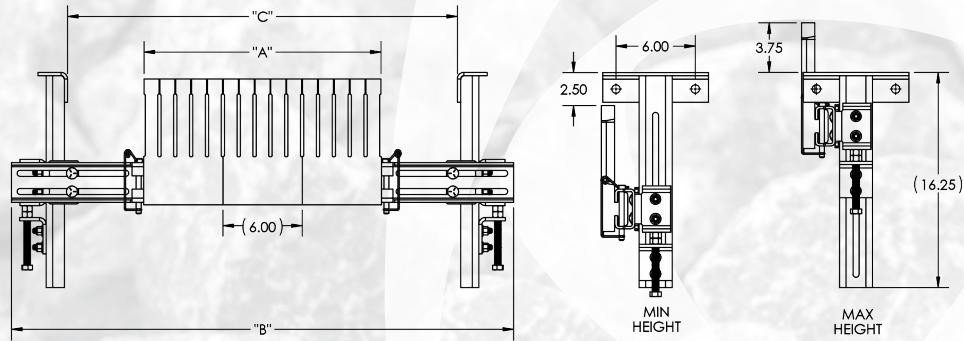

Part Number	A		B		Min C		Max C	
	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)
CP-CBC24A-G83	24.00	(610)	44.00	(1118)	27.50	(699)	43.00	(1092)
CP-CBC30A-G83	30.00	(762)	50.00	(1270)	33.50	(851)	49.00	(1245)
CP-CBC36A-G83	36.00	(914)	56.00	(1422)	39.50	(1003)	55.00	(1397)
CP-CBC42A-G83	42.00	(1067)	62.00	(1575)	45.50	(1156)	61.00	(1549)
CP-CBC48A-G83	48.00	(1219)	68.00	(1727)	51.50	(1308)	67.00	(1702)
CP-CBC54A-G83	54.00	(1372)	74.00	(1880)	57.50	(1461)	73.00	(1854)
CP-CBC60A-G83	60.00	(1524)	80.00	(2032)	63.50	(1613)	79.00	(2007)

Notes:


- Standard sizes shown above. Other sizes are available from 12" (305 mm) to 72" (1829 mm).

## SPECIFICATIONS


Recommended Belt Speeds:  
0 - 500 fpm (2.5 m/s)

Mounting Distance:  
Horizontal: 1-9" (25-229 mm)  
Vertical: 0-6" (0-152 mm)

## NOMENCLATURE

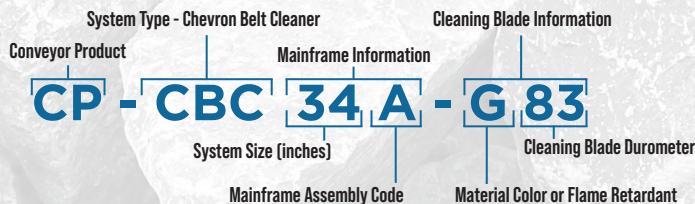

## MOUNTING INFORMATION

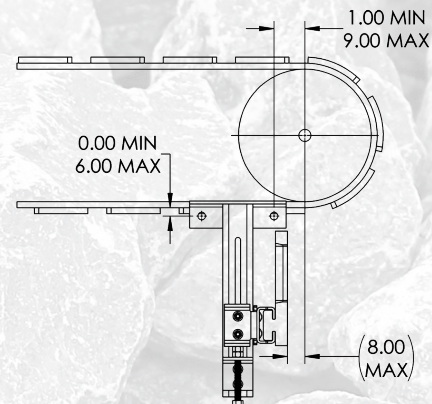

520 9th Street • Gwinn, MI 49841  
 906.226.9747 f: 906.226.9779  
[www.argonics.com](http://www.argonics.com)



The Argonics Nested Triangle logo and Perma-Torque™ are trademarks of Argonics, Inc.  
 Patents: 6,056,112; 7,441,647; 5,979,638 LIB-CP-CBC-04-01 3/25